


Molded Case Circuit Breakers

G-TWIN series

Type number nomenclature

■ Type number nomenclature

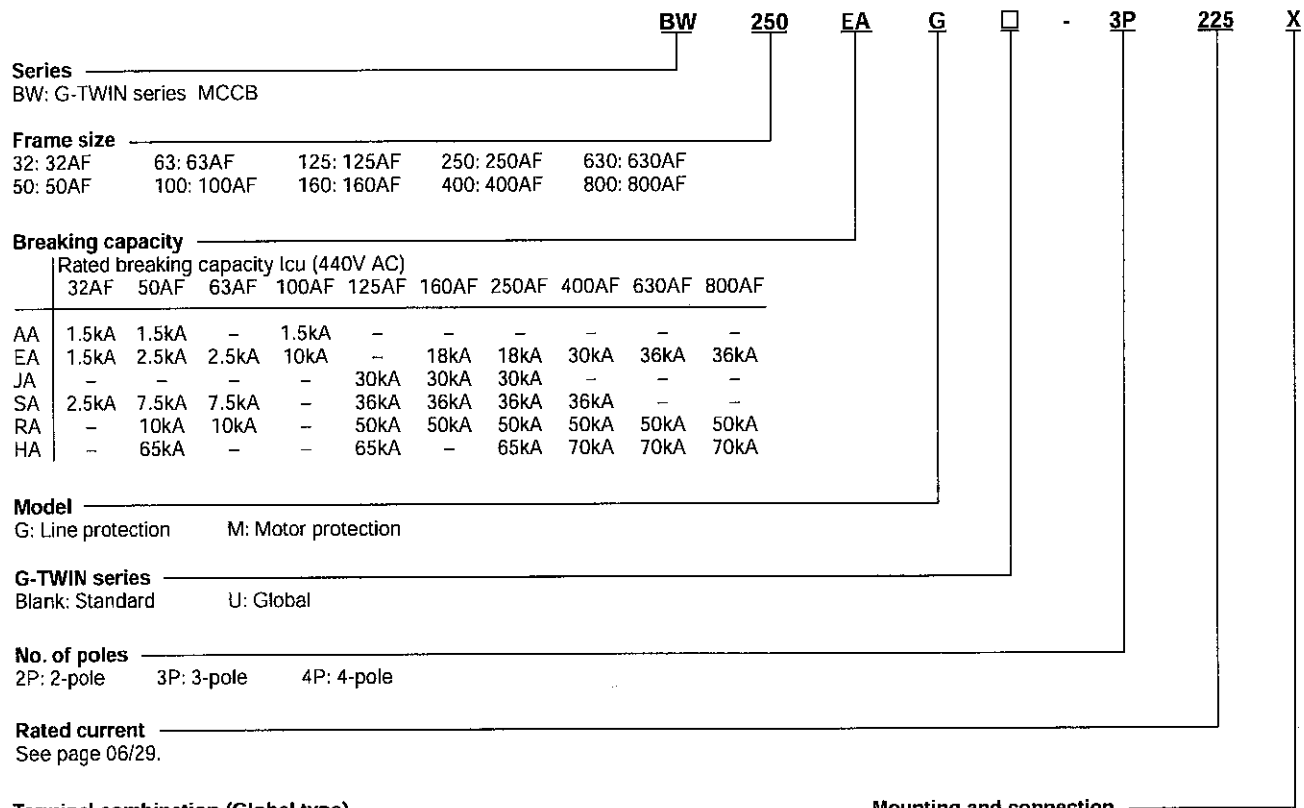

Terminal combination (Global type)

| Code | Terminal position | | Applicable breaker type | | |
|-------|-------------------|----------------|-------------------------|-----------------|-----------------|
| | Line | Load | BW50 | BW100, 125, 250 | BW400, 630, 800 |
| Blank | Screw | Screw | ● | ● | - |
| Blank | Flat terminal | Flat terminal | - | - | ● |
| SB | Block terminal | Block terminal | - | ● | ● |
| SF | Flat terminal | Flat terminal | ● | ● | - |
| S3 | Screw | Flat terminal | ● | ● | - |
| S4 | Flat terminal | Screw | ● | ● | - |
| S5 | Screw | Block terminal | - | ● | - |
| S6 | Block terminal | Screw | - | ● | - |
| S7 | Flat terminal | Block terminal | - | ● | ● |
| S8 | Block terminal | Flat terminal | - | ● | ● |

Mounting and connection


• Standard type

- Blank: Front mounting front connection
- X: Front mounting rear connection
- E: Flush mounting rear connection
- Y: Flush-mounting, top & bottom connection
- P: Plug-in mounting

Molded Case Circuit Breakers

G-TWIN series

Type number nomenclature

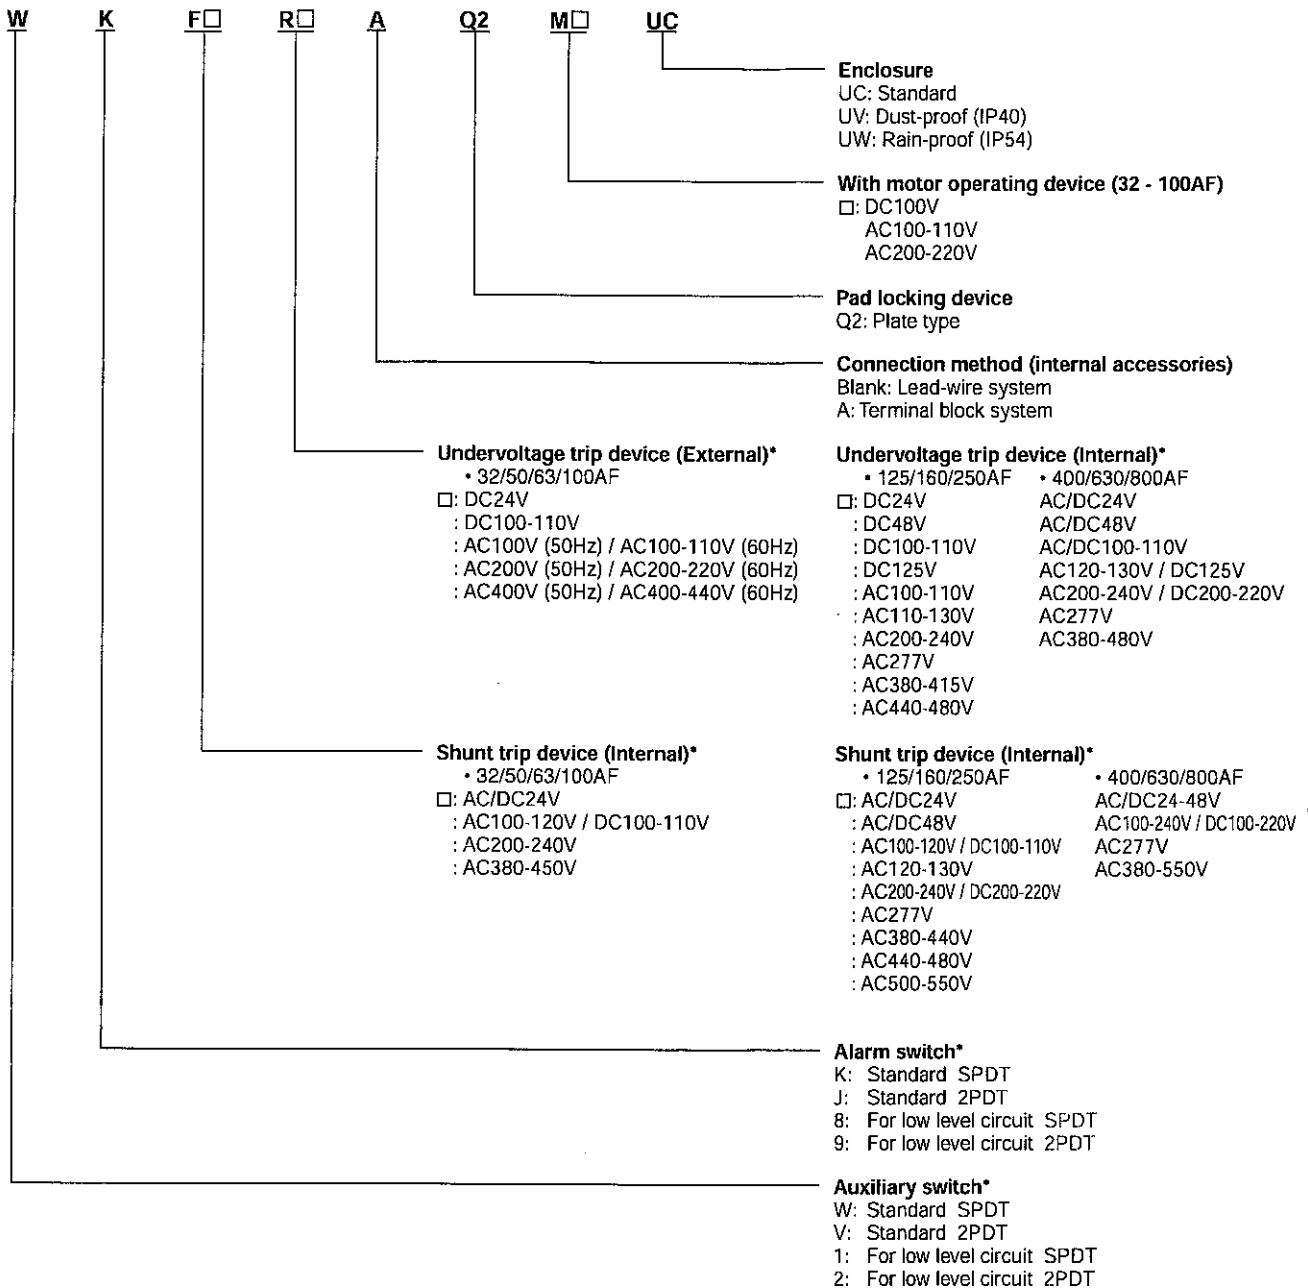

06

* For the available configuration of accessory, see page 06/68.

Molded Case Circuit Breakers

G-TWIN series

External accessories

N type handles

| | |
|-------|----------------|
| MCCB | N type handle |
| BW32 | BZ6N10D |
| BW50 | |
| BW63 | |
| BW100 | |
| BW125 | BW9N0CA |
| BW160 | BW9N0GA |
| BW250 | |
| BW400 | BW9N0HA |
| BW630 | BW9N0JA |
| BW800 | |

V type handles

| | |
|------------------|----------------|
| MCCB | V type handle |
| BW32 BW32 | BZ6V10D |
| 50 BW50 | |
| BW63 | |
| BW100 | |
| BW125 | BW9V0CA |
| BW160 | BW9V0GA |
| BW250 | |
| BW400 | BW9V0HA |
| BW630 | BW9V0JA |
| BW800 | |

■ Type number nomenclature

• N type handle

BW9N0CA - □

□ Mounting (For BZ6N10D, BW9N0HA, BW9N0JA)

Blank: Front mounting, front connection
 X: Front mounting, rear connection
 P: Plug-in mounting

□ Basic type

• V type handle

BW9V0CA - □

□ Mounting (For BZ6V10D, BW9V0HA, BW9V0JA)

Blank: Front mounting, front connection
 X: Front mounting, rear connection
 P: Plug-in mounting

□ Basic type

Note:
 To order a V handle for front-mounting rear connection breakers, add "-X" to the type number; for plug-in mounting breakers, add "-P" to the type number.

F type handles

| | |
|-------|----------------|
| MCCB | N type handle |
| BW125 | BW9F0CA |
| BW250 | BW9F0GA |
| BW400 | BW9F0HA |

• F type handle

BW9F0 □ A

□ Breaker type

C: BW125□□U
 G: BW250□□U
 H: BW400□□U

□ Basic type

Cable (For F type)

BW9FW □ A - □ A

□ Cable length

15: 1.5m
 20: 2.0m
 30: 3.0m

□ Breaker type

C: BW125□□U
 G: BW250□□U
 H: BW400□□U

□ Basic type

Terminal cover (For F type)

BW9FBT □ A - L3

□ Breaker type

C: BW125□□U
 G: BW250□□U
 H: BW400□□U

□ Basic type