

bar stock two-valve manifold, block and bleed



Technical features

Rating: 6000 psig; or 10000 psig (code **10K**).

Tee-bar: AISI 303 st.st.

Stem: AISI 316 L st.st.

Non-rotating needle: AISI 316 L st.st (code **5**), (or special materials).

Bonnet: AISI 316 L st.st (code **5**), (or special materials).

Packing: PTFE or Graphoil (see chart below).


Nuts: carbon steel.

Line dust cup: Hytrel, blu.

Drain dust cup: Hytrel, red.

Bonnet seal: AISI 316L st.st. seal.

Manifold body and drain plug: AISI 316 L st.st. (code **5**), (or special materials).


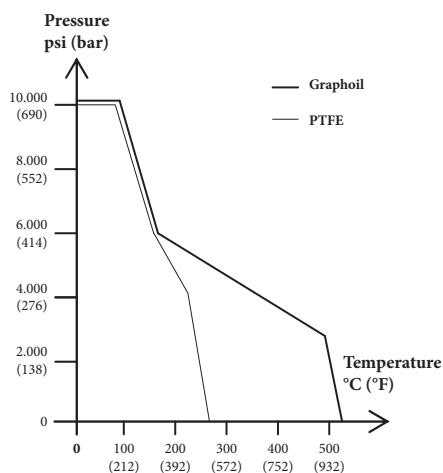


OPTIONS

10K - Rating bonnet : 10000 psi	LOK - T-Bar handle locking
ANT - Anti-tamper	P02 - Oxygen service
E30 - NACE version as per MR 0103/0175-ISO15156	SMI - Tag
GRA - Graphoil packing	2" stake's bracket for yoke mounting

5.M2M - BSM/M2M - male process connection

RC3 - 05/17

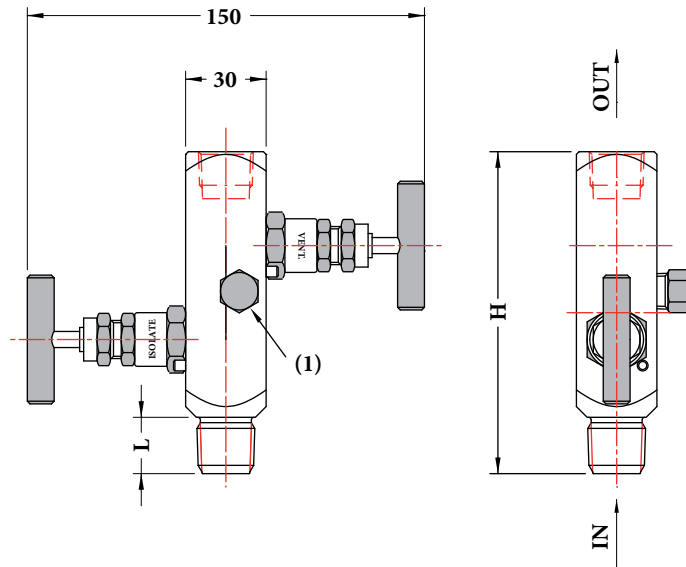



Weight: 0,88 kg

Code	IN-OUT	H	L
43M x 43F	1/2" NPT M x 1/2" NPT F	110	20

(1) Drain 1/4" NPT F with plug

dimensions : mm

5.M2F - BSM/M2F - female process connection

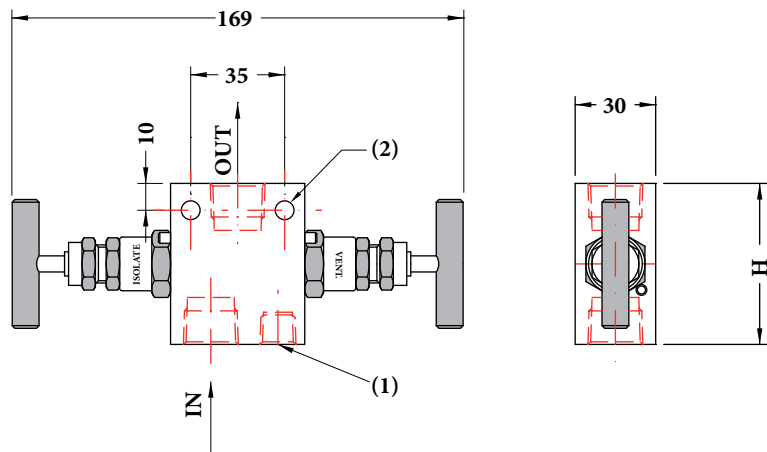

Weight: 0,90 kg

Code	IN-OUT	H
43F x 43F	1/2" NPT F x 1/2" NPT F	60

(1) Drain 1/4" NPT F with plug

(2) No. 2 fixing holes \varnothing 7 mm

dimensions : mm

"HOW TO ORDER" SEQUENCE

Section / Model / Material / Process connection / Instrument connection / Options
5 M2M 5 43M 43F 10K...S31
M2F 43F