
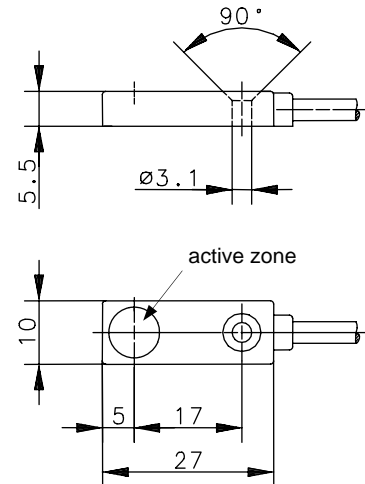


Series E27

Type designation **MEK-E27NB/H02-K2**

Item number **6363893031**

Wiring diagram

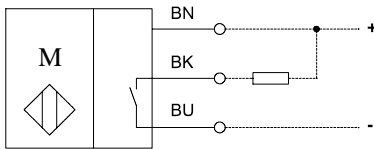

Characteristic features in accordance with EN 60947-5-2

Electrical data

Assured operating distance	S _a	30 mm
Switching function		NPN, open collector, bistable
Operational voltage range	U _B	5-24 VDC
Switching current		25 mA
Supply current		< 5 mA
Voltage drop	U _d	< 1 V
Switching element		Hall, typ. 2 mT, (south on, north off)
Short-circuit protection		Current limiting
Frequency of operating cycles	f	20 kHz
Assembly position		optional
False polarity protection		yes
Corresponding magnet		T-62 N/S

Electromagnetic compatibility (EMC)

Electromagnetic field test	IEC 61000-4-3
Electrostatic discharge test	IEC 61000-4-2
Electrical fast transient immunity test (Burst)	IEC 61000-4-4
Radiated disturbance field strength	EN 55011

Mechanical Data

Enclosure	PA 6.6
Ambient air temperature	-25 °C ... +70 °C (cabel fixed mounted)
Type of protection	IP67 acc. to IEC 529, EN 60529
Indication	LED, yellow; output activated
Termination type	cabel 3 x 0,14 mm ² x 2 m; PVC-Outer jacket, black

EU Conformity



This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual from the here described condition are excluded. Subject to modifications and amendments.

Date of issue: 20.05.2008 / Page 1 of 1
Document: 6363893031_en / Last update: 1 / 0171-08