

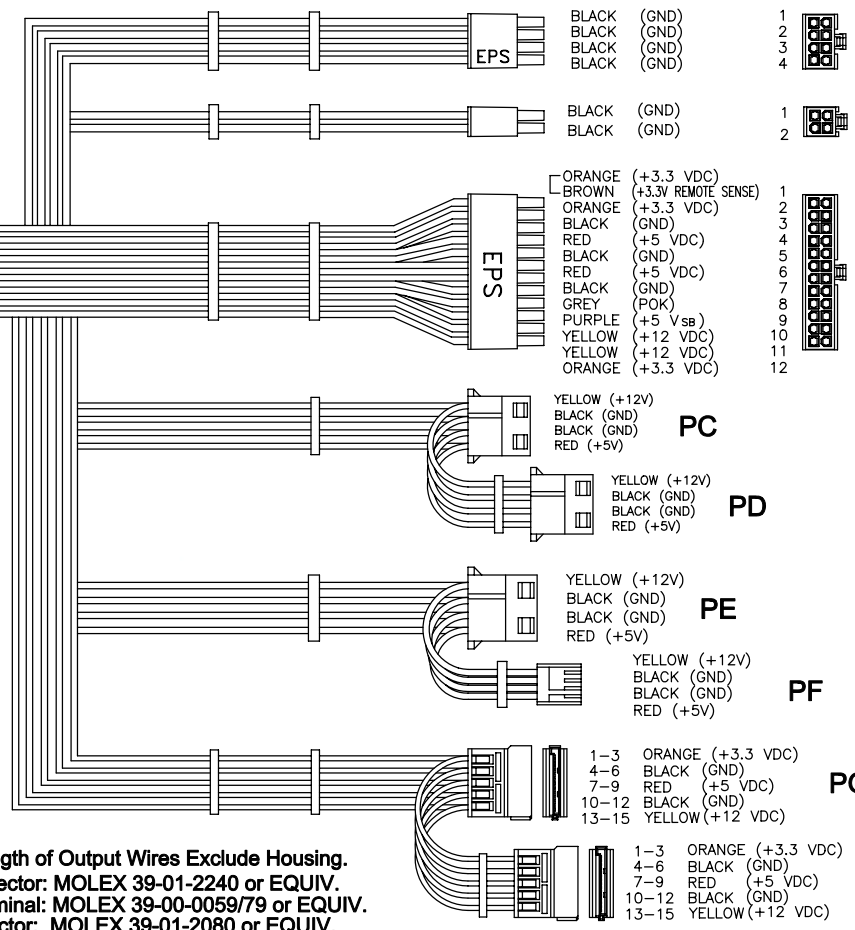
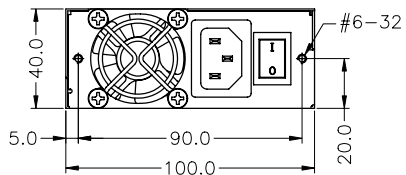

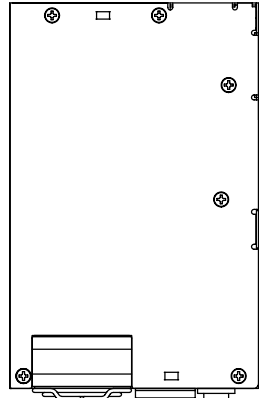




REV. REVISIONS		日期 DATE
版次 REV.	記述 DESCRIPTION	

A
B
C
D
E

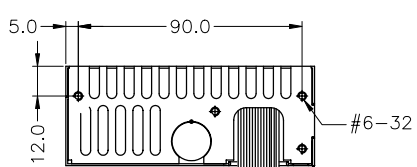

1	5	YELLOW (+12 VDC)	PA
2	6	YELLOW (+12 VDC)	
3	7	YELLOW (+12 VDC)	
4	8	YELLOW (+12 VDC)	

1	3	YELLOW (+12 VDC)	PB
2	4	YELLOW (+12 VDC)	

1	13	ORANGE (+3.3 VDC)	P24
2	14	BLUE (-12 VDC)	
3	15	BLACK (GND)	
4	16	GREEN (PS-ON)	
5	17	BLACK (GND)	
6	18	BLACK (GND)	
7	19	BLACK (GND)	
8	20	N/C	
9	21	RED (+5 VDC)	
10	22	RED (+5 VDC)	
11	23	RED (+5 VDC)	
12	24	BLACK (GND)	

HOUSING	LENGTH
P24	450
PA	460
PB	450
PC	460
PD	200
PE	460
PF	200
PG	500
PH	200

Tolerances: ±20
Units: mm

Notes:

- (a) All the Length of Output Wires Exclude Housing.
- (b) P24 Connector: MOLEX 39-01-2240 or EQUIV.
Terminal: MOLEX 39-00-0059/79 or EQUIV.
- (c) PA Connector: MOLEX 39-01-2080 or EQUIV.
Terminal: MOLEX 39-00-0059/79 or EQUIV.
- (d) PB Connector: MOLEX 39-01-2040 or EQUIV.
Terminal: MOLEX 39-00-0059/79 or EQUIV.
- (e) PC~PE Connector: AMP 1-480424-0 or EQUIV.
Terminal: AMP 61117-4 or EQUIV.
- (f) PF Connector: AMP 171822-4 or EQUIV.
Terminal: AMP 170262-1 or EQUIV.
- (g) PG,PH Connector: MOLEX 675820000 or EQUIV.
Terminal: MOLEX 675810000 or EQUIV.



容許公差: TOLERANCES: .XXX ±.025 .XX ±.100 .X ±.250	材料規格: MATERIAL:	品名: MODEL NO:	新巨企業股份有限公司 ZIPPY TECHNOLOGY CORP. POWER DIVISION
核對者: APPROVE BY:	日期: DATE:	圖號: PART NO:	H1U-5300V B00H1U030V009
繪圖者: DRAW BY:	日期: DATE:	單位: UNITS:	規格: SPEC.:
第三角法	日期: DATE:	版次: REV. NO:	A1 B1
	日期: DATE:	編號: SHEET:	B00H1U030V009 B00H1U030V009 OF