


3 - PHASE MEASURING CURRENT TRANSFORMERS

TAS-240



- Cable aperture: 3 @ 15.5 x 30mm
- Primary current: 60 to 200A
- Secondary terminals M4 Screws
- 25mm hole pitch
- Sealable terminal cover included
- Housing Material Self extinguishing UL-94/VO
- Weight: 500g

Primary Current A	Burden			Code
	cl 0.5 VA	cl. 1 VA	cl. 3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
200	1.5	2.5	3.0	200
5A Secondary				

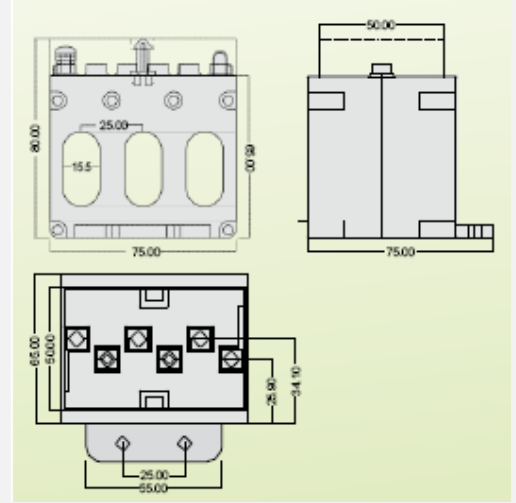


TAS-242



- Cable aperture: 3 @ 21 x 25mm
- Primary current: 60 to 250A
- Secondary terminals M4 Screws
- 35mm hole pitch
- Sealable terminal cover included
- Housing Material Self extinguishing UL-94/VO
- Weight: 550g

Primary Current A	Burden			Code
	cl 0.5 VA	cl .1 VA	cl .3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
200	1.5	2.5	3.0	200
250	1.5	2.5	3.0	250
5A Secondary				

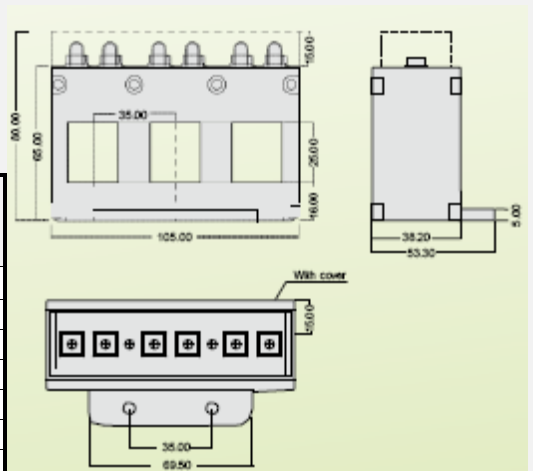


TAS-248



- Cable aperture: 3 @ 31 x 31mm
- Primary current: 250 to 630A
- Secondary terminals M4 Screws
- 45mm hole pitch
- Sealable terminal cover included
- Housing Material Self extinguishing UL-94/VO
- Weight: 680g

Primary Current A	Burden			Code
	cl 0.5 VA	cl.1 VA	cl. 3 VA	
250	1.5	2.5	3.0	250
300	2.5	3.75	4.0	300
400	2.5	3.75	4.0	400
500	2.5	3.75	4.0	500
600	2.5	3.75	4.0	600
630	2.5	3.75	4.0	630
5A Secondary				

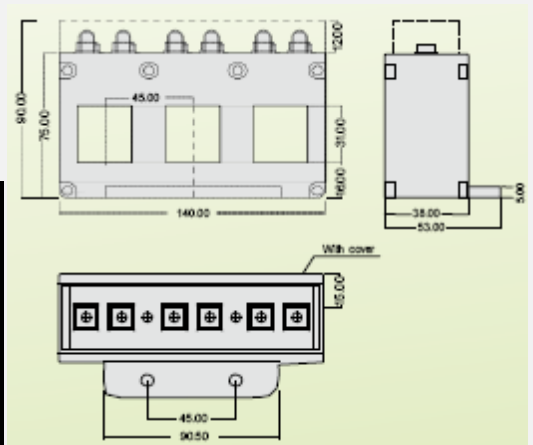

£12.00 each + VAT & Carriage