

MODEL NUMBER

11-11510-00


PRODUCT LINE

GO™ Switch 10/20 Series

SPECIFICATIONS

Model	11 Model
Contact Form	SPDT (Form C)
Sensing Range	Standard approx. 3/8" side
Outlet Position	Bottom of enclosure
Enclosure Material	Standard Enclosure
Area Classification	CSA/FM CI I, Div 2
Wiring Options	Terminal block - 1/2" NPT
Regional Certification	No regional certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

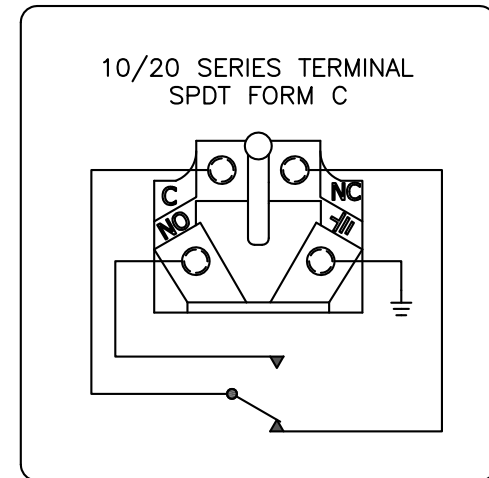

Current as of January 31, 2024 – Subject to change without notice.

NAMEPLATE

GO SWITCH CE UK CA CCC FM APPROVED

COUNTRY OF ORIGIN US

3300 Fern Valley Road
TopWorx 40213, USA

CL DIV 2, GRPS A,B,C,D, CL II DIV 1, GRPS E,F,G, CL III
T5/T4, 50°C, T5: 60°C/80°C
ELECTRICAL RATING: 120VAC/10A, 24VDC/1A RESISTIVE, 480VAC/24VDC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE
CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.

50

LR 2428



Model #: Serial #:

TOPWORX

(502)969-8000 PH



Compagnia Generale Elettronica
Misure – Regolazioni – Sicurezza
MILANO – ITALIA

Tel. 02/2563197 – 2564194 – Fax 02/2590178
E-mail : cecogen@cecogen.com - WEB: www.cecogen.com